

## **B-29 USING WAVELET TRANSFORM AND SELF ORGANIZING MAPS FOR SEISMIC RESERVOIR CHARACTERIZATION OF A DEEP-WATER FIELD, CAMPOS BASIN, BRAZIL**

MARCÍLIO C. MATOS<sup>1,3</sup>, PAULO L.M. OSÓRIO<sup>1</sup> AND PAULO R.S. JOHANN<sup>2</sup>

<sup>1</sup>*Pontifícia Universidade Católica, DEE, Rua Marquês de São Vicente, 225, 22453-900 - Rio de Janeiro-BRAZIL*

<sup>2</sup>*Petrobras*

<sup>3</sup>*Military Institute of Engineering*

### **Introduction**

Seismic facies analysis is not a deterministic and simple task. Usually, facies analysis is performed through the following steps [1]:

- 1- Geological oriented spatial and temporal segmentation of seismic traces (input space);
- 2- Seismic attributes selection (variable space);
- 3- Choosing the optimal number of classes (facies) and algorithm iterations;
- 4- Training and classification of the selected attributes using some statistical or neural networks methods (pattern space);
- 5- Building and interpreting facies map.

Normally, the geological oriented spatial and temporal segmentation should be carefully done, because any horizon interpretation error could lead to wrong or very noisy facies results. The attributes selection is another complex task, because they should be physically consistent and statistically independent. It's common to use the whole seismic trace amplitudes around the region of interest [2].

Nowadays, Self Organizing Maps (SOM), or Kohonen Maps [3], has become one of the most popular tools to build seismic facies maps [4]. But, it's still empirical how to choose the number of classes and the best seismic attributes to discriminate geological features from seismic data.

This work presents a new alternative to extract seismic pattern attributes and a new methodology to build seismic facies maps. We propose to use Wavelet Transform to identify singularities in each geological oriented segment of the temporal seismic trace and them using SOM in a two-level approach [5]. To illustrate this technique it was applied to real data from a deep-water field on Campos Basin, Brazil.

### **Seismic Trace Singularity Detection with Wavelet Transform**

Signal transitions can be described using its local degree of regularity, which can be derived from a multi-scale evaluation of the wavelet coefficients that are caused by the transitions. Mallat and Hwang [6] showed that the amplitude evaluation along the modulus maxima line formed by the undecimated wavelet transform, also called Wavelet à Trous, can be used to characterize signal singularities, as follows:

1. Decompose the signal using wavelet à trous;
2. Find the Wavelet Transform Modulus Maxima Line (WTMML), checking if all its points are in the cone of influence;
3. Evaluate the amplitudes along the modulus maxima line (WTMMLA).

Figure 1 illustrates that procedure applied to two different synthetic traces, traces 06 and 10, obtained from a synthetic wedge model and the resulting WTMMLA confirms they can be used as different patterns to a classification system. WTMMLA can also be viewed, in a very simple form, as the ridges of the Continuous Wavelet Transform.

The WTMMLA has been used to obtain the Hölder exponent as another seismic attribute [7], but, in this work, it was preferred to use the whole WTMMLA curve as singularities patterns.

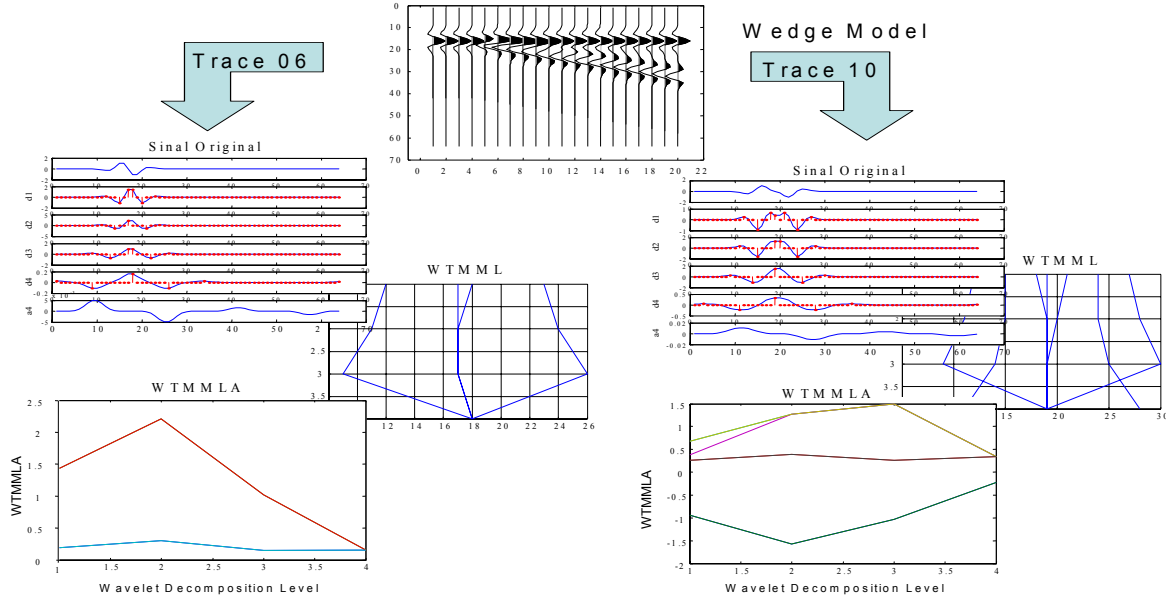


Figure 1: Synthetic signals; its wavelet à trous decomposition; WTMML and WTMMLA.

### Self Organizing Maps (SOM) and Seismic Facies Analysis

SOM, besides producing a similarity graph of input data, is an effective tool for the visualization and clustering of high-dimensional data. Basically, it converts the nonlinear statistical relationships between high-dimensional data into simple geometric relationships of their image points on a lower-dimensional display, usually a regular two-dimensional grid of nodes. Thus, the SOM can be interpreted as a topology preserve mapping from input space onto the two-dimensional grid of map units.

The obtained grid can be used as a powerful qualitative visualization tool for showing different features of the data, as their cluster structure. A useful tool to evaluate the cluster structure is the Unified Distance Matrix - U-matrix, which gives the distances between prototype vectors of neighboring map units. Typically, red color indicates high distances and blue color indicates short distances. This gives an impression of “mountains” (long distances), which divide the map into “fields” (dense parts) or clusters. Each cluster represents a different class.

Figure 2 illustrates the SOM applied to 32 seismic trace amplitudes around the base of reservoir horizon in a deep-water field. It was used a K-means algorithm to cluster the SOM map and the minimum Davies-Bouldin index as the number of clusters [5].

### Wavelet transform (WTMMLA) and Kohonen Map (SOM)

The method proposed here brings together the wavelet bi-orthogonal seismic trace expansion with the clustering characteristics of the SOM and K-means to obtain an interesting new way to cluster seismic facies as follows:

1. Segment each seismic trace around a geological oriented region;
2. Find the Wavelet Transform Modulus Maxima Line Amplitudes(WTMMLA) using the desired number of levels;
3. Visualize the self-organizing map (SOM) formed using WTMMLA as the seismic attributes input space;
4. Cluster the SOM using K-means, or other clustering algorithm, with as many clusters as shown on the SOM map or use some empirical metrics as the Davies-Bouldin index;
5. Construct and interpret the facies map.

As an example, the method proposed was applied to a 3D seismic data from a deep-water field in Campos Basin, offshore Brazil and the result, using only the two largest WTMLA, illustrated in Figure 3 seems consistent showing a very good cluster definition in the SOM map exactly as obtained by petrophysical and other analyses [8].

The whole algorithm, from SEGY files and horizon reading to seismic maps visualization, was implemented using Matlab from Mathworks and the SOM Toolbox from Helsinki University of Technology.

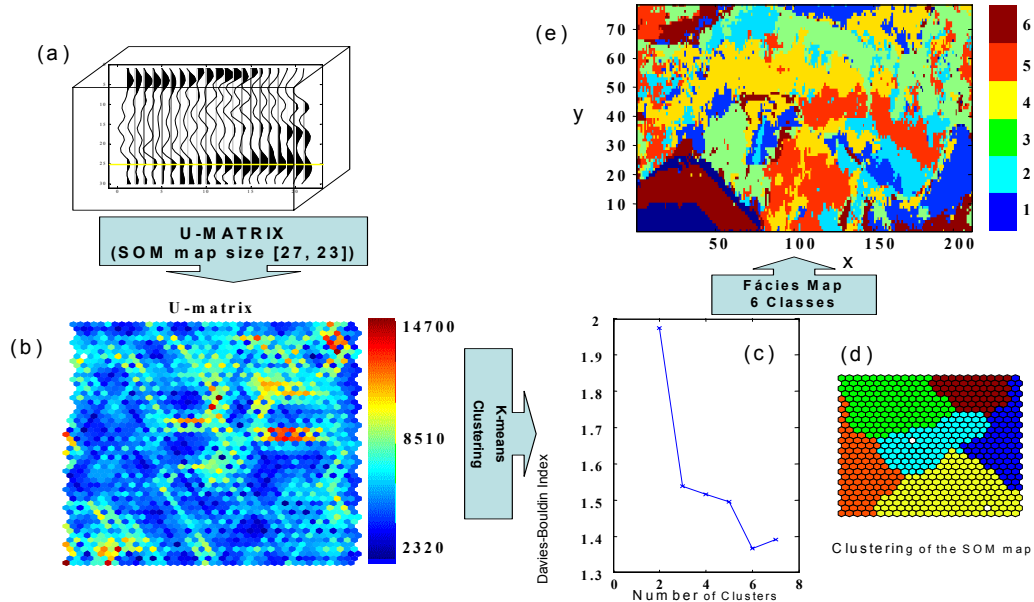


Figure 2: **Facies analysis methodology.** This example uses 32 seismic amplitudes around the reservoir bottom as input attribute. (a) seismic amplitudes; (b) The U-matrix of a 27x23 SOM map; (c) Davies-Bouldin index with 6 class minima; (d) clustering of SOM map and (e) facies map

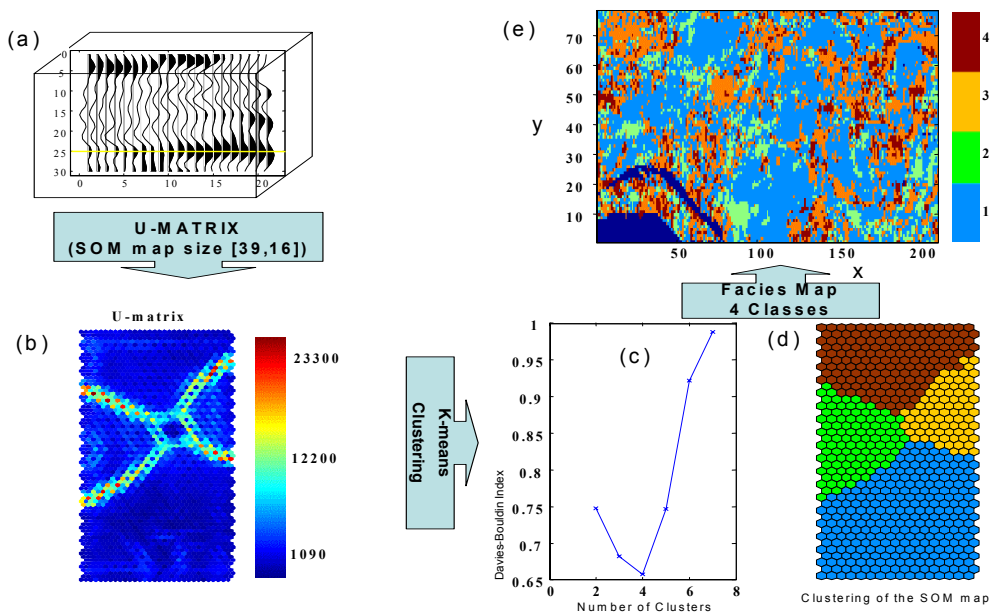


Figure 3: **Facies analysis methodology.** This example uses the two largest WTMLA as input attributes. (a) seismic amplitudes; (b) The U-matrix of a 39x16 SOM map; (c) Davies-Bouldin index with 4 classes minima; (d) clustering of SOM map and (e) facies map

## Conclusions

Results have shown that the new method proposed for seismic facies analysis can be an alternative way to 3D or 4D seismic reservoir characterization. Particularly, we proposed a new approach to extract reliable seismic attribute as input data to self-organizing map visualization and clustering of an entire volume of seismic data set of a deep-water field in Campos Basin, offshore Brazil.

## Acknowledgments

The authors would like to thank ANP (Brazilian Petroleum Agency) and Petrobras for the permission to use the seismic data contained herein and to Petrobras financial support through PRAVAP 19 program. We also thank Evaldo C. Mundim from Petrobras for his comments and help.

The first author is also grateful to Steen Petersen from Norsk Hydro Research Center in Bergen for his help in reading SEG Y files using Matlab.

## References

- [1] Johann. P., Castro, D. D., and Barroso, A. S., 2001, Reservoir Geophysics: Seismic pattern recognition applied to ultra-deepwater oilfield in Campos Basin, Offshore Brazil: SPE International, Argentina.
  - [2] Taner, M. T., Walls, J. and Taylor, G., 2001, Seismic attributes, their use in petrophysical classification: EAGE 63rd Conference & Technical Exhibition – Amsterdam, The Netherlands, June, 11 – 15.
  - [3] Kohonen, T., 2001, Self-organizing maps: Springer-Verlag New York, Incorporated, 3<sup>RD</sup>.
  - [4] Morice, M., Keskes, N., JeanJean, F., 1996, Manual and automatic seismic facies on SISMAGE workstation: Un example of image analysis technique applied to the exploration of Perdana-Nakhoda turbidic fan complex (Pliocene offshore Brunei), IMA3G research project, Elf aquitaine production. 1996 SEG Meeting abstracts.
  - [5] Vesanto, J., Alhoniemi, E., 2000, Clustering of the Self-Organizing Map: IEEE Transactions on Neural Networks, Volume 11, Number 3, pp. 586-600.
  - [6] Mallat S., Hwang W.L., 1992, Singularity detection and processing with wavelets, IEEE Transactions on Information Theory, vol. 32, no. 2.
  - [7] Hoekstra, E.V., 1996, Multiscale Analysis of Seismic Data by the Wavelet Transform: Msc. Thesis, Delft University of Technology.
  - [8] Johann, P., 1997, Inversion sismo-stratigraphique et simulations stochastiques: reservoir turbiditique, offshore du Brésil. Intégration géologique, géophysique et géostatistique en 3-D, Ph. D. Thesis, Université de Paris VI.
-